




■ EN35 Series

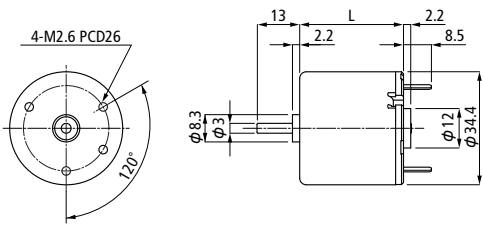


Type	L(mm)
M	31.6
L	38.2

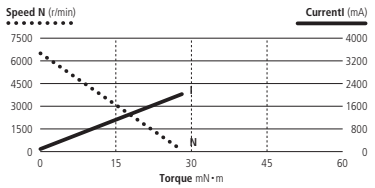


EN35 M 12V

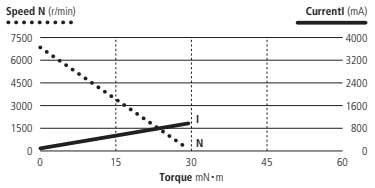

EN35 M 24V

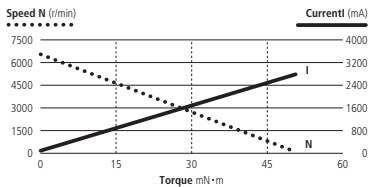

EN35 L 12V

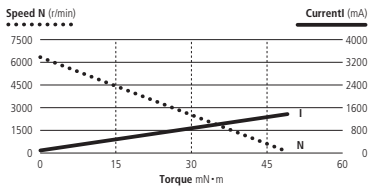

EN35 L 24V

MODEL	Rated Voltage	Rated Power Output	Rated Torque	Rated Speed	Rated Current	No Load Speed	No Load Current	Starting Torque	Torque Constant	Winding Resistance	Winding Inductance	Moment of Inertia	Mechanical Time Constant	Thermal Resistance
	V	W	mN·m(gf·cm)	r/min	mA	r/min	mA	mN·m(gf·cm)	mN·m/A(gf·cm/A)	Ω	mH	g·cm²	ms	°C/W
EN35 M	12	2.3	3.92 (40)	5700	340	6500	95	28.4 (290)	16.1 (164)	6.0	3.5	21.0	49	27
	24	2.5	3.92 (40)	6000	175	6900	50	29.4 (300)	30.8 (314)	23.7	12.8	21.0	52	26
EN35 L	12	4.5	7.85 (80)	5500	550	6400	100	49.0 (500)	17.1 (174)	3.9	2.6	35.0	47	24
	24	4.5	7.85 (80)	5500	280	6400	50	49.0 (500)	33.7 (344)	15.0	10.7	35.0	46	23